

GULVVARME

Datablad

Wavin Comfia Parallelshunt



Wavin Comfia Parallelshunt

Wavin Comfia Parallelshunt benyttes til styring af fremløbstemperaturen i gulvvarmeanlæg med to til seksten kredse. Vi anbefaler, at Wavin Comfia Parallelshunt benyttes med Wavin Comfia 1" fordelerrørssæt (VVS nr. 046301220, 046301320, 046301420 eller 046301520) med to, tre, fire eller fem kredse. Fordelerrørerne kan sammenbygges til det ønskede antal kredse. Se på wavin.dk for en komplet liste af produkter der kan anvendes sammen med Wavin Comfia parallelshunten.

Wavin Comfia Parallelshunt leveres med

1. Grundfos UPM3 AUTO cirkulationspumpe
2. Kapillarrørstermostat til styring af fremløbstemperatur
3. Isoleret holder for kapillarrørssensor og termometer (Inkl.)
4. Manuel luft skrue på ventilblok
5. Isoleringssæt til cirkulationspumpe
6. Bæringer for fordelerrør/shunt

Ekstraudstyr

Til styring af rumtemperaturen, kan Wavin Comfia Parallelshunt forsynes med Wavin Sentio gulvvarmestyring eller Wavin AHC 9000 gulvvarmestyring.

Sentio

Sentio styreenheden (VVS nr. 466333811) kan styre gulvvarme i op til otte rum. Hvis der er mere end otte rum skal der tilkobles et udvidelsesmodul (VVS nr. 466333058). Styreenheden kombineres med Sentio rumtermostat og telestat (VVS nr. 466333125). Display til Sentio styreenhed kan tilkøbes separat (VVS nr. 466333801).

Ønskes det at Midishunten skal forsynes med vejrkompensering skal der yderligere anvendes en servomotor (VVS nr.



466333835), to anlægssensorer (VVS nr. 466333830) og en udendørsensor (VVS nr. 466333807).

AHC 9000

Ved op til to gulvvarmekredse anvendes Wavin AHC 9000 styring (VVS nr. 466330202). Ved tre og op til ti gulvvarmekredse anvendes Wavin AHC 9000 styreenhed med display (VVS nr. 466330130), eller Wavin AHC 9000 styreenhed uden display (VVS nr. 466330216), samt Wavin AHC 9000 rumtermostat med display og telestat (VVS nr. 466331324).

Parallelshunten er forberedt for, at de tilsluttede fordelerrør kan isoleres med Wavin Comfia 1" isoleringssæt for gulvvarme 16 kredse (VVS nr. 046301916).

Varenumre

Wavin nr.	VVS nr.	Beskrivelse
3097966	466220336	Wavin Comfia Parallelshunt, UPM AUTO 15-70

Tekniske oplysninger


Maks. temperatur	95° C
Min. temperatur	2° C
Maks. tryk	10 bar
Maks. differenstryk	0,8 bar
Min. differenstryk	0,1 bar
Kvs-værdi f/shuntens reguleringsventil	2,0

Grundfos UPM3 15-70 130 pumpe

P _{max}	Korr. forbrug. 0,4 (BE18)
52 W	20,8 W

Målskitse for Wavin Parallelshunt med Grundfos UPM AUTO pumpe


Mål (mm)	Antal kredse															
	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
Højde (H1)	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390	
Længde (L1)	217	267	317	367	417	467	517	567	617	667	717	767	817	867	917	
Bredde (B1)	265	265	265	265	265	265	265	265	265	265	265	265	265	265	265	

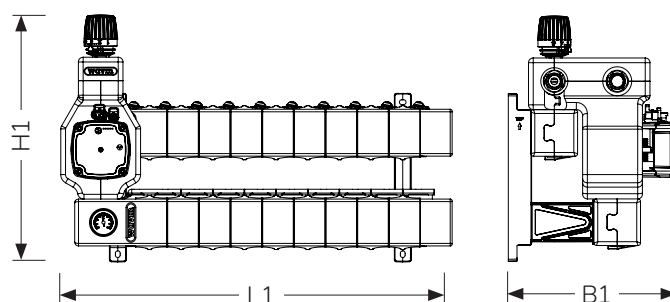


Vægt

Antal kredse	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vægt (Kg)	6.0	6.7	7.3	7.9	8.5	9.1	9.6	10.2	10.8	11.4	12.0	12.6	13.2	13.8	14.4

Principdiagram

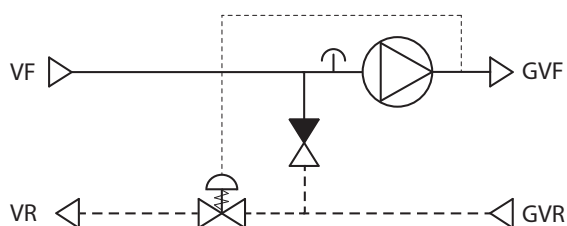

Tilslutningsskitse

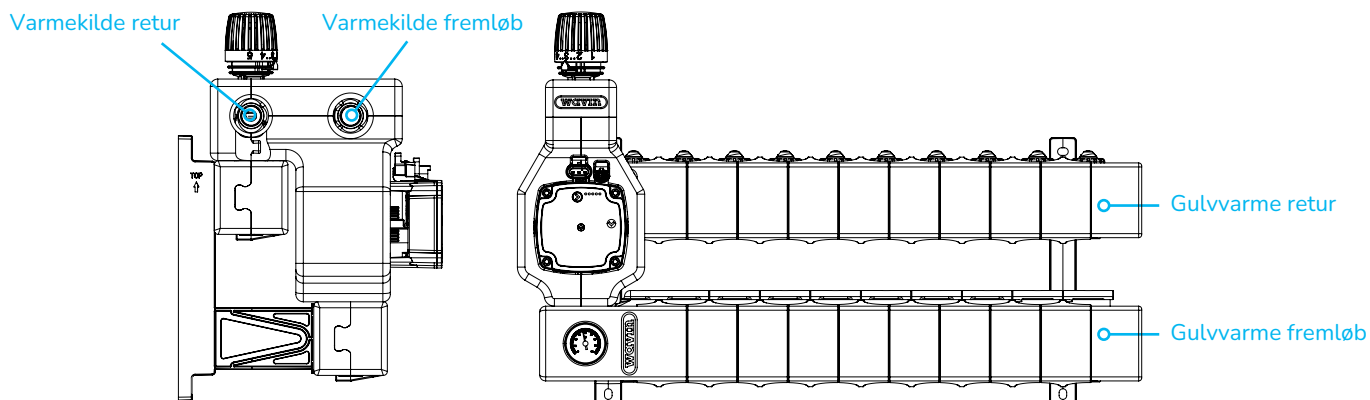

Advancing Indoor Comfort with Wavin

From family homes to apartments, Wavin stands as the trusted choice for a comprehensive indoor climate solution. Through innovative controls, it seamlessly integrates underfloor heating, ceiling heating and cooling, heat interface units and mechanical ventilation.

All components work harmoniously in a unified solution, Advancing Indoor Comfort with efficiency and ease.

- Surface heating and cooling
 - Heat interface units
- Mechanical ventilation
- Smart control systems



Wavin is part of Orbia, a community of companies working together to tackle some of the world's most complex challenges.

We are bound by a common purpose:
To Advance Life Around the World.

Wavin | Wavinvej 1 | DK-8450 Hammel | Telefon +45 8696 2000 | Internet www.wavin.dk
E-mail wavin.dk@wavin.com | www.wavin.com

Wavin operates a programme of continuous product development, and therefore reserves the right to modify or amend the specification of their products without notice. All information in this publication is given in good faith, and believed to be correct at the time of going to press. However, no responsibility can be accepted for any errors, omissions or incorrect assumptions.

© 2026 Wavin Wavin reserves the right to make alterations without prior notice. Due to continuous product development, changes in technical specifications may occur. Installation must comply with the installation instructions.